

DH400™

High Pressure Flex Tubes

Technical Data

A three-ply, polyamide-fabric braid-polyamide, flexible tube with factory installed 400 or 300 Series stainless steel tips



Features


- Lightweight: tube weight is only 16 g/m of length (0.5 oz/yd)
- Working pressure: up to 6 000 psi (41 MPa)
- Flexibility: bending radius of 2.4 cm (15/16 in) at maximum operating pressure
- Temperature: no derating of operating pressure for temperatures from -34 °C to 100 °C (-30 °F to 212 °F)
- Weather: inert to ozone and ultraviolet
- Safety: burst pressure of 20 000 psi (138 MPa) for a 3.3 margin with operating pressure
- Aging: negligible humidity absorption
- Growth: less than 5 % physical change overall at maximum operating pressure
- Chemical resistance: compatible with an extremely wide range of liquid and gas media

Used in systems where high pressure flexible connections are needed to facilitate frequent make and break operations, allow individual movement of components under pressure and/or withstand high frequency vibration.

Standard lengths

Lengths shown for each tube configuration are standard.
Other non-standard lengths are available up to 90 m (300 ft).


DH200 "medium pressure" coned and threaded tip

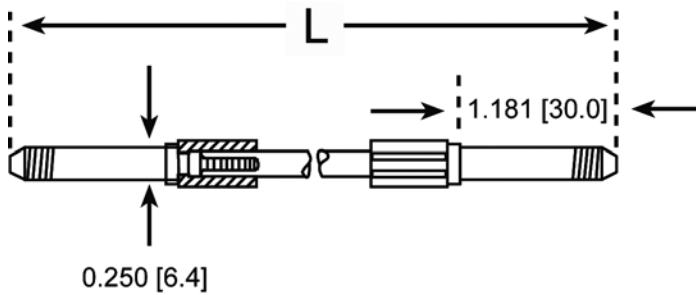

Model	L
F1515-8	20 cm (8 in)
F1515-12	30.5 cm (12 in)
F1515-24	61 cm (24 in)
F1515-36	91 cm (36 in)
F1515-48	122 cm (48 in)
F1515-60	152 cm (60 in)
F1515-72	183 cm (72 in)
F1515-96	244 cm (96 in)

Parts and adapters
Collar
Gland
F x 1/8 in NPTF
F x 1/8 in NPTM
F x 1/4 in NPTF
F x 1/4 in NPTM
F x AN4F
F x AN4M


DH200 "high pressure" coned and threaded tip

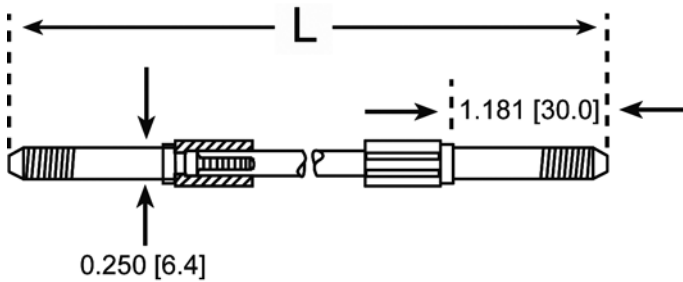

Model	L
F5050-8	20 cm (8 in)
F5050-12	30.5 cm (12 in)
F5050-24	61 cm (24 in)
F5050-36	91 cm (36 in)
F5050-48	122 cm (48 in)
F5050-60	152 cm (60 in)
F5050-72	183 cm (72 in)
F5050-96	244 cm (96 in)


Parts
Collar
Gland

1/8 in plain adapter tip

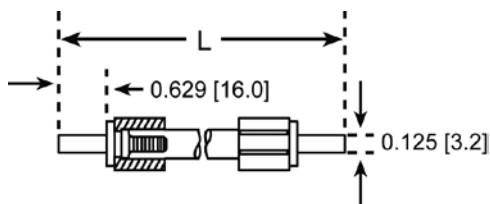

Model	L
F1818-8	20 cm (8 in)
F1818-12	30.5 cm (12 in)
F1818-24	61 cm (24 in)
F1818-36	91 cm (36 in)
F1818-48	122 cm (48 in)
F1818-60	152 cm (60 in)
F1818-72	183 cm (72 in)
F1818-96	244 cm (96 in)


1/4 in plain adapter tip

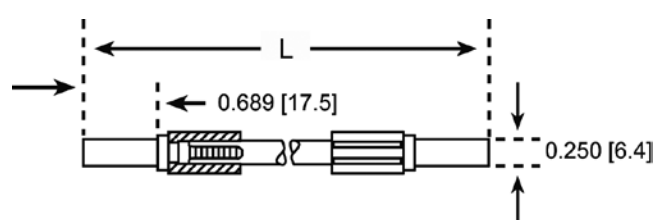

Model	L
F1414-8	20 cm (8 in)
F1414-12	30.5 cm (12 in)
F1414-24	61 cm (24 in)
F1414-36	91 cm (36 in)
F1414-48	122 cm (48 in)
F1414-60	152 cm (60 in)
F1414-72	183 cm (72 in)
F1414-96	244 cm (96 in)


Standard lengths

1/8 in plain adapter tip with nuts and ferrules installed*

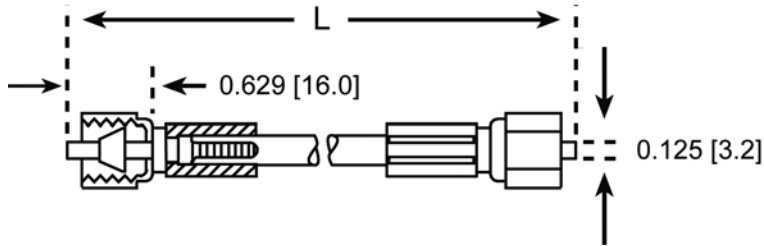


Model	L
F1818NF-8	20 cm (8 in)
F1818NF-12	30.5 cm (12 in)
F1818NF-24	61 cm (24 in)
F1818NF-36	91 cm (36 in)
F1818NF-48	122 cm (48 in)
F1818NF-60	152 cm (60 in)
F1818NF-72	183 cm (72 in)
F1818NF-96	244 cm (96 in)

1/4 in plain adapter tip with nuts and ferrules installed*

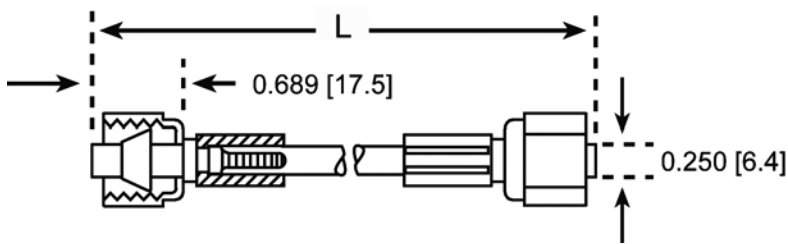

Model	L
F1414NF-8	20 cm (8 in)
F1414NF-12	30.5 cm (12 in)
F1414NF-24	61 cm (24 in)
F1414NF-36	91 cm (36 in)
F1414NF-48	122 cm (48 in)
F1414NF-60	152 cm (60 in)
F1414NF-72	183 cm (72 in)
F1414NF-96	244 cm (96 in)

AN4 type flare tip

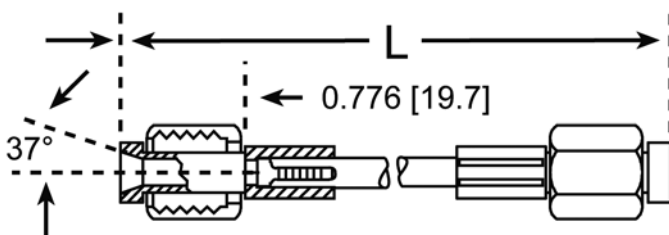

Model	L
F3737-8	20 cm (8 in)
F3737-12	30.5 cm (12 in)
F3737-24	61 cm (24 in)
F3737-36	91 cm (36 in)
F3737-48	122 cm (48 in)
F3737-60	152 cm (60 in)
F3737-72	183 cm (72 in)
F3737-96	244 cm (96 in)

* Standard nuts and ferrules are Gyrolok®. Other brands available at slightly higher prices.

Compatibility chart

+ = Resistant
 - = Non-Resistant
 0 = Relatively Resistant
 @ = Not Yet Tested

	7 °C (20 °F)	16 °C (60 °F)
Acetate Solvents	+	+
Acetic Acid 10%	+	0
Acetone	+	+
Acetylene	+	+
Aluminum	+	+
Aluminum Chloride	+	+
Aluminum Fluoride 20%	0	0
Aluminum Sulfate	+	+
Ammonia, Conc.	+	-
Ammonium Chloride	+	+
Ammonium Hydroxide	+	+
Ammonium Nitrate	+	+
Ammonium Phosphate	+	+
Ammonium Sulfate	+	+
Amyl Acetate	+	+
Amyl Alcohol	+	+
Aniline Dyes	+	+
Barium Chloride	+	+
Barium Hydroxide	+	+
Barium Sulfide	+	+
Benzene	+	0
Borax	+	+
Boric Acid	+	+
Brake Fluid	+	+
Bromine	-	-
Butane	+	+
Butanone	+	+
Butyl Acetate	+	+
Butyl Alcohol	+	+
Calcium Bisulfite	+	+
Calcium Chloride 10%	+	+
Calcium Hydroxide	+	+
Calcium Hypochlorite 50%	0	-
Carbon Dioxide	+	+
Carbon Disulfide	0	-
Carbon Monoxide	+	+
Carbon Tetrachloride	+	+
Chlorine Gas	-	-
Chloroacetone	+	0
Chlorobenzene	0	-
Chloroform	0	-
Chlorosulfuric Acid	-	-
Chloracetic Acid	0	-
Chromic Acid	-	-
Copper Chloride	+	+
Copper Sulfate	+	+

	7 °C (20 °F)	16 °C (60 °F)
Crude Oil	+	+
Dibutyl Phthalate	+	+
Diesel Oil, Light	+	+
Essential Oils	+	+
Ether	0	-
Ethyl Alcohol	+	+
Ethyl Acetate	+	+
Ethyl Chloride	+	+
Ethylene Glycol	+	+
Ferric Chloride 10%	+	+
Ferric Sulfate	+	+
Fluorosilicic Acid	-	-
Formaldehyde	+	0
Formic Acid 10%	+	0
Fuel Oil	+	+
Gas Oil	+	+
Gasoline	+	+
Glucose	+	+
Glycerin, Glycerol	+	+
Glycol	+	+
Glystantine	+	+
Grease	+	+
Heptane	+	+
Hexane	+	+
Hydrofluoric Acid	-	-
Hydrogen	+	+
Hydrogen Peroxide	+	+
Hydrogen Sulfide	+	0
Iron Salt Solvents	+	+
Lactic Acid 10%	+	0
Linseed Oil	+	+
Liquid Gas	+	+
Lubricating Oils	+	+
Magnesium Chloride	+	+
Magnesium Hydroxide	+	+
Magnesium Sulfate	+	+
Mercury	+	+
Mercury Chloride	+	+
Methyl Alcohol	+	+
Methyl Chloride	0	-
Methyl Ethyl Ketone	+	+
Methyl Isopropyl Ketone	+	+
Mineral Oil	+	+
Naphtha	+	+
Natural Gas	+	+
Nickel Chloride	+	+

	7 °C (20 °F)	16 °C (60 °F)
Nickel Sulfate	+	+
Nitric Acid	-	-
Nitrobenzene	0	0
Oleic Acid	+	0
Oxalic Acid, Dilute	+	0
Oxygen	+	+
Perchloroethylene	+	+
Petrol (Kerosene)	+	+
Phenol	-	-
Potassium Chloride	+	+
Potassium Cyanide	+	+
Potassium Hydroxide	+	+
Potassium Sulfate	+	+
Propane	+	+
Seawater	+	+
Soda Lye 40%	+	+
Sodium Bicarbonate 10%	+	+
Sodium Bisulfate	+	+
Sodium Carbonate	+	+
Sodium Chloride	+	+
Sodium Cyanide	+	+
Sodium Hydroxide 20%	+	+
Sodium Hypochlorite 5%	+	+
Sodium Nitrate	+	+
Sodium Perborate	+	0
Sodium Silicate	+	+
Sodium Sulfate	+	+
Sodium Sulfide	+	+
Sodium Thiosulfate	+	+
Sole	+	+
Sulfur	+	+
Sulfur Chloride	-	-
Sulfur Dioxide	+	+
Sulfur Trioxide	-	-
Sulfuric Acid 10%	0	-
Thiophene	+	0
Tin Chloride	+	+
Toluene	+	0
Trichloroethylene	0	0
Varnishes	+	+
Water	+	+
Xylene	+	0
Zinc Chloride	+	+
Zinc Sulfate	+	+

Non-flammable hydraulic fluids

	7 °C (20 °F)	16 °C (60 °F)
Houghten Safe 360	+	+
Houghten Safe 440	+	+
Houghten Safe 620	+	+
Bergbau Safe 620 B/36	+	+
Bergbau Safe 1010	+	+
Bergbau Safe 1120	+	+
Bergbau Safe 1125	+	+
HSD 16-Bayer Elaol-VL	+	+
HSD 25-BP-Olex SFD 0204	+	+
Pydraul 10E	+	+
Pydraul 29E LT	+	+

	7 °C (20 °F)	16 °C (60 °F)
Pydraul 30E	+	+
Pydraul 50E	+	+
Pydraul 65E	+	+
Pydraul 90E	+	+
Pydraul 115E	+	+
Pydraul 230C	+	+
Pydraul 312C	+	+
Pydraul 540C	+	+
Skydrol 500	+	+
Skydrol 700	+	+

Fluke. *Keeping your world up and running.®*

Fluke Calibration
 PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
 PO Box 1186, 5602 BD
 Eindhoven, The Netherlands

For more information call:
 In the U.S.A. (800) 443-5853 or
 Fax (425) 446-5116
 In Europe/M-East/Africa +31 (0) 40 2675 200 or
 Fax +31 (0) 40 2675 222
 In Canada (800)-36-FLUKE or
 Fax (905) 890-6866
 From other countries +1 (425) 446-5500 or
 Fax +1 (425) 446-5116
 Web access: <http://www.fluke.com>

©2010 Fluke Corporation.
 Specifications subject to change without notice.
 Printed in U.S.A. 7/2010 3387716B B-EN-N

Modification of this document is not permitted without written permission from Fluke Corporation.